

August, 2011

Single-screw extrusion modeling effects on extrusion processing parameters and physical properties of DDGS-based Nile tilapia (*Oreochromis niloticus*) feeds

Ferouz Y. Ayadi, *South Dakota State University*

Parisa Fallahi, *South Dakota State University*

Kurt A. Rosentrater, *United States Department of Agriculture*

Kasiviswanathan Muthukumarappan, *South Dakota State University*

Single-screw extrusion modeling effects on extrusion processing parameters and physical properties of DDGS-based Nile tilapia (*Oreochromis niloticus*) feeds

Ferouz Y. Ayadi

Graduate Research Assistant, South Dakota State University, Brookings, SD 57007.

Parisa Fallahi

Graduate Research Assistant, South Dakota State University, Brookings, SD 57007.

Kasiviswanathan Muthukumarappan, ASABE Member Engineer

Professor, South Dakota State University, Brookings, SD 57007.

Kurt A. Rosentrater, ASABE Member Engineer

Bioprocess Engineer, USDA, ARS, North Central Agricultural Research Laboratory, Brookings, SD 57007.

Written for presentation at the
2011 ASABE Annual International Meeting
The Galt House
Louisville, Kentucky
August 7-10, 2011

Abstract. A single-screw laboratory extruder was used to conduct an $L_{18}(2^2 \times 3^6)$ Taguchi fractional factorial study of aquafeed processing. The ingredients were based on a formulation for nutritionally-balanced Nile tilapia diets containing distillers dried grains with solubles (DDGS) and soybean meal as the main protein sources, in addition to constant amounts of corn flour, whey, and fish meal. The effects of three levels of DDGS (20, 30 and 40%), soybean meal (30, 40 and 50%), ingredient moisture content (20, 30 and 40% db), screw speed (100, 150 and 200 rpm), barrel temperatures (80-100-100°C, 80-120-120°C and 80-140-140°C), and die dimensions (L/D ratios of 5, 9 and 13), and two levels of screw configuration (compression ratios of 2:1 and 3:1) on extrudate physical properties (moisture content, water activity, color, bulk density, unit density, pellet durability index, expansion ratio, water stability, water absorption and solubility indices) and extruder processing parameters (resulting temperatures, extruder torque, die pressure, mass flow rate, and specific mechanical energy) were determined. Data from raw materials, processing conditions, and extrudate properties were used to develop surface response curves and equations. However, predominantly low R^2 values (< 0.5) only permitted linear relationships between some independent parameters and response variables. Regarding main effects, die pressure significantly decreased with higher DDGS levels, moisture content, temperature, lower die L/D, and higher screw compression. Significant differences in color were caused by changes in DDGS levels and moisture content. Expansion ratio decreased significantly with higher moisture content and lower die L/D. In summary, DDGS, moisture content, die dimension, and the extruder had the biggest impact on most of the extrudate physical properties and processing conditions. Different combinations of these independent factors can be used to achieve desired extrudate physical properties and processing conditions.

Keywords. Aquaculture, Extrusion, Modeling, Physical Properties, Protein

Introduction

Depletion of wild fisheries, combined with rising demands for seafood products for human foods, has led to increase aquaculture production during the last few decades. Depending upon the species and maturity, fish have high protein demands of up to 55% (NRC, 1993). Fish meal is one of the main protein sources used in aquatic feeds, because of high palatability and growth performance. Demand for the limited supply of wild fish has steadily increased fish meal prices. For example prices for fish meal for July 2010 were above \$1370 per ton, compared to \$600 per ton for July 2005 (USDA, 2010). For certain fish species, feed costs alone can represent up to 70% of the highest total cost for an aquaculture operation (Webster and Lim, 2002; Metts et al., 2007). Protein accounts for the major feed cost. Studies have shown that less expensive alternative protein sources can, at least partially, replace fish meal and satisfy protein demands and achieve good growth performance. These can be found in various animal and plant sources. Ayadi et al. (2010) provided a comprehensive review of many of these alternatives. For instance, meat and bone meal has been used in salmonids feeds (Bureau et al., 2000). Poultry by-product meal has been used in commercial diets for sunshine bass and hybrid striped bass (Rawles et al., 2009; Rawles et al., 2010). Soybean meal (SBM) is one of the most studied and widely used plant protein sources in commercial aquatic feeds for many species, such as tilapia, hybrid striped bass, rainbow trout, Atlantic salmon (*Salmo salar*) and sunshine bass (*Morone chrysops* × *M. saxatilis*) (Steffens, 1994; Thompson et al., 2008; Furuya et al., 2004; Rawles et al., 2009). Distillers dried grains with solubles (DDGS) is the major nonfermentable coproduct of ethanol production, and is mostly made from corn grain. Compared to other protein sources, such as SBM, DDGS is competitive on a per unit protein basis, highly palatable to fish (Lim et al., 2009), and does not contain of anti-nutritional factors that are present in most pulses such as soybean meal. In numerous studies, DDGS has been examined as a potential protein substitute in fish feed for species such as Nile tilapia, channel catfish, and rainbow trout (Webster et al., 1993; Wu et al., 1996; Cheng and Hardy, 2004; Lim et al., 2007).

Nile tilapia (*Oreochromis niloticus*) originated in Africa, and is one of the most important cultured fish species worldwide. Global tilapia production has increased exponentially within the last 30 years. For example, in 1998, 0.7 million metric tonnes (t) of Nile tilapia were produced compared to 2.3 million t in 2008, of which Asia has become the major producer (FAO, 2010). For the US market, tilapia production increased from 15,521 t in 1998 to 81,130 t in 2008 (FAO, 2010). It is the fifth most popular seafood consumed in the US (ATA, 2010). Tilapia has relatively fast growth, undemanding feed conditions, and physical hardiness (Fitzsimmons, 2006). Protein requirements depend on maturity and can be up to 45% for Nile tilapia fry (El-Sayed and Teshima, 1992; Hafedh, 1999), whereas bigger fish can require down to 30% protein (Hafedh, 1999; Bahnasawy, 2009). Even though Nile tilapia has been classified as herbivorous, it has been reported that Nile Tilapia also feed on insects, algae, plant material, and potentially other fish (Njiru et al., 2004).

Dietary components are only one aspect of fish feed. The other is feed production. High quality aquatic feeds are commonly produced by extrusion processing, which can produce floating or sinking feeds and improve digestibility (Pezzato, 1999). Extrusion processing has become very popular in the feed and food industries due to high versatility, productivity, and product quality. Previous research by our group has focused on several processing aspects of DDGS-based feeds. Single-screw and twin-screw extrusion have been used to produce feed for tilapia, channel catfish, yellow perch, and rainbow trout. The effects of various levels of DDGS, ingredient moisture contents, protein contents, screw speeds, barrel temperatures, and die dimensions, respectively, various extruder processing parameters and extrudate physical properties have been examined (Chevanan et al., 2007a, 2007b, 2007c, 2008, 2009, 2010; Kannadhasan et al., 2009a, 2009b, 2010; Rosentrater et al., 2009a, 2009b; Ayadi et al., 2010a, 2010b, 2010c). Most of these studies, however, were empirical and deterministic in nature. Follow-up modeling studies on extrusion can help to predict output parameters (e.g. physical properties) based on extruder processing settings and/or formulations of the raw blends.

Extrusion cooking involves many complex processes that are difficult to control due to interactions between mass, energy, and momentum transfer phenomena. Physicochemical changes impact extrudate physical properties which can be difficult to predict (Wang et al., 2001). Some research has been conducted on modeling of extrusion processes and product quality. For example, Meng et al. (2010) used second-order polynomial regression to model twin-screw extruder system parameters (feed moisture content, screw speed, and barrel temperature) and physical properties of chickpea flour-based snacks. A similar modeling study was developed by Ding et al. (2005) for rice-based expanded snacks. Chevanan et al. (2007c) developed neural network and regression models of single-screw extrusion of aquaculture feed containing DDGS; data collected from different trials were combined to predict extrudate properties and extrusion processing parameters based on die dimensions, ingredient moisture content, barrel temperature, and screw speed. Wang et al. (2001) performed modeling of twin-screw extrusion to control extrudate quality attributes. Multiple regression models were developed by Girish et al. (2004) to relate the radial expansion of extrudates with die nozzle dimensions and back pressure at the die for acetylated starch in a twin-screw extruder. Yusuf et al. (1996) developed a regression model to study the effects of temperature and screw speed on the radial, axial and overall expansion as well as bulk density of extruded corn grits in a single-screw extruder.

In this study, the goal was to model the effects of various levels of DDGS, soybean meal, ingredient moisture contents, screw speeds, barrel temperatures, and die dimensions on resulting extrudate physical properties (moisture content, water activity, color, bulk density, unit density, pellet durability index, expansion ratio, water stability, water absorption and solubility indices) and extruder processing parameters (barrel temperature, extruder torque, die pressure, mass flow rate, and specific mechanical energy).

Materials and Methods

Experimental Design

A L_{18} ($2^2 \times 3^6$) Taguchi fractional factorial design was used as the experimental design. The treatment combinations consisted of 18 trials with 2 levels of screw compression ratio (2:1, 3:1), 2 levels of fish meal (9.99% and 9.98%), 3 levels of DDGS (20, 30 and 40%), 3 levels of soybean meal (30, 40 and 50%), 3 levels of moisture content (20, 30 and 40% db), 3 levels of die dimension (L/D ratios of 5, 9 and 13), 3 levels of barrel temperature profile (80-100-100, 80-120-120 and 80-140-140 ° C) and 3 levels of screw speed (100, 150 and 200 rpm).

Feed Blend Preparation

Six ingredient blends (Table I) were adjusted to a target protein content of ~ 30% db, a target fat content of ~ 17% db, and three different moisture contents of 20, 30, and 40% db. With increasing DDGS levels (20, 30, 40% db) and thus decreasing soybean meal levels (50, 40, 30%) but a constant level of fish meal, corn flour, and whey, these ingredients were used to prepare nutritionally-balanced diets for Nile tilapia. DDGS was provided by Dakota Ethanol, LLC (Wentworth, SD) and soybean meal was obtained from Dakotaland Feeds, LLC (Huron, SD). These were ground with a Wiley Mill (Model 4, Thomas Scientific, Swedesboro, NJ) to a flour with an average particle size of approximately 500 μm . Low temperature menhaden fish meal was purchased from Consumers Supply Distributing Co. (Huron, SD); corn flour from Cargill Dry Corn Ingredients, Inc. (Paris, IL); animal feed dried whey from Midor Ltd (Elroy, WI).

The whey was sieved manually (Sieve No. 14, ASTM E-11, Daigger, Vernon Hills, IL) to prevent coagulation within the blends. The components were then blended in a rotary mixer 10 min (Kushlan Products, Inc., Goldendale, WA). After all ingredients were thoroughly combined, each blend was adjusted to the desired moisture content of 20, 30, and 40%, respectively, by adding adequate amounts of water and then thoroughly mixed using a laboratory-scale mixer (Professional 6, KitchenAid, St. Joseph, MI).

Raw Ingredient Properties

Each raw blend was analyzed for moisture content, water activity, and color (Hunter L, a, b values). Then the methods used for the other properties will be discussed subsequently.

Extrusion Processing

A single-screw extruder (Model PL 2000 Brabender Plasti-Corder, South Hackensack, NJ) with a barrel length of 317.5 mm was used to extrude each blend. Three different were used, with length- to – diameter (L/D) ratios of 5, 9 and 13. The center of the die assembly was conical, and tapered from an

initial diameter of 6.0 mm to a diameter of 2.0, 3.2 or 6.0 mm, respectively, at the discharge opening. A 7.5 HP (5.5 kW) motor was connected to the extruder. During extrusion, the screw speed was adjusted to 100, 150 and 200 rpm, respectively. For all runs, the temperature of the feed zone was controlled and maintained at 80°C, that of the transition zone at 100, 120, and 140 °C, respectively, and that of the die zone at 100, 120, and 140 °C, respectively.

The raw blends were manually funneled into the extruder in constant quantities to avoid jamming at the opening to the barrel. All processing data were collected every 60 s, and the average of eight (n=8) recordings were used for statistical analyses, except for mass flow rate where three samples (n=3) were used.

Temperature Profile, Die Pressure and Torque

The absolute pressure at the die zone and the temperature profile at the feed, metering, and die zone were simultaneously monitored every minute for eight (n=8) recordings using a combined thermocouple/pressure transducer (GP50, New York Ltd., Grand Island, NY). Likewise, the net torque exerted on the screw drive shaft was recorded with a torque transducer (Measurement Specialists, Huntsville, AL) at a sensing range of 0-390 Nm every minute for eight recordings.

Mass Flow Rate (MFR)

Extrudate samples exiting the die were collected at 30 s intervals and weighed using an electronic balance (PB 5001, Mettler Toledo, Switzerland) to quantify the mass flow rate.

Apparent Viscosity (η_{app})

The extruder was assumed to be a coaxial cylinder-shaped viscometer, where the screw and barrel were considered as an inner and an outer cylinder, respectively (Rogers 1970; Lu et al 1992; Rosentrater et al 2005; Chevanan et al 2007). The apparent viscosity of the dough was calculated using:

$$\eta_{app} = \left(\frac{C_{ss}}{C_{sr}} \right) \times \left(\frac{\tau}{\omega} \right) \quad (1)$$

where η_{app} is the apparent viscosity of the dough (Pa·s), τ is the net torque exerted on the screw shaft (N·m), ω is the screw speed (rpm), C_{ss} is an empirical correction factor for the shear rate which relates to the screw configuration, and C_{sr} is an empirical correction factor for the shear rate which relates to the barrel size, where:

$$C_{ss} = \frac{1}{2\pi \cdot L_s \cdot r_{corr}^2} \quad (2)$$

$$C_{sr} = \frac{2r_b^2}{r_b^2 - r_{corr}^2} \quad (3)$$

$$r_{eff} = \sqrt{\left(\frac{1}{3}\right) \cdot (r_{eff_1}^2 + r_{eff_1} \cdot r_{eff_2} + r_{eff_2}^2)} \quad (4)$$

where r_{corr} is the radius correction factor due to the frustum geometry of the screw (m), r_b is the barrel radius (m), L_s is the screw length in the axial direction (m), and r_{eff} is the effective radius of the screw obtained from the sum of the screw root and half of the flight height (m).

Specific Mechanical Energy (SME)

Specific mechanical energy (J/g) was calculated using equation (5), following Harper (1981):

$$SME = \frac{\tau \cdot \omega \cdot 60}{m_{feed}} \quad (5)$$

where τ is the net torque exerted on the screw shaft (N·m), ω is the screw speed (rpm), and m_{feed} is the mass flow rate of the dry feed (g/min) calculated using the following equation:

$$m_{feed} = MFR \cdot \left(\frac{1 - MC_f}{1 - MC_e} \right) \quad (6)$$

where MC_f is the moisture content of the feed blend (% wb) and MC_e is the moisture content of the extrudate at the die (% wb).

Extrudate Physical Properties

After the prepared blends were cooked in the extruder and dried for 72 h at room temperature ($25 \pm 1^\circ\text{C}$), they were then analyzed for moisture content (% db), water activity (-), bulk density (kg/m^3), unit density (kg/m^3), expansion ratio (-), pellet durability index (%), water absorption and water solubility indices (%), water stability (min), and color (-). For all treatment runs, three samples ($n=3$) were used to determine the physical properties.

Moisture Content (MC)

According to AACC method 44-19 (2000), the moisture content of the raw material and extrudate samples for each blend were determined using a laboratory oven (Thelco Precision, Jovan, Winchester, VA) at 135°C for 2 h.

Water Activity (a_w)

Water activity was measured for the raw material and extrudate samples from each treatment with a water activity meter (aw Sprint TH-500, Novasina, Pfäffikon, Switzerland). The sample bowl was filled with each sample and then placed into the measuring chamber of the pre-calibrated instrument.

Bulk Density (BD)

Bulk density (BD) was determined as the ratio of the mass of extrudates in a given bulk volume. A standard bushel tester (Seedburo Equipment Company, Chicago, IL) was used following the method described by USDA (1999).

Unit Density (UD)

The extrudates were cut to a length of 25.4 mm, weighed on an analytical balance (Adventurer™, Item No. AR 1140, Ohaus Corp. Pine Brook, NJ), and then measured with a digital caliper (Model No. CD-6" C, Mitutoyo Corp., Tokyo, Japan) to determine their diameter. According to Rosentrater et al. (2005) the unit density (UD, kg/m³) was calculated as the ratio of the mass *m* (kg) to the volume *V* (m³) of each measured and weighed extrudate sample, assuming a cylindrical shape for each extrudate:

$$UD = \frac{m}{V} \quad (7)$$

Expansion Ratio (ER)

The ratio of the diameter of each extrudate for each blend, measured with a digital caliper (Digimatic caliper, Model No: CD-6" C, Mitutoyo Corp., Tokyo, Japan), to the diameter of the die nozzle (2.0, 3.2, or 6.0 mm) was used to quantify the radial expansion ratio (neglecting longitudinal and volumetric expansion).

Pellet Durability Index (PDI)

Pellet durability index was determined following Method S269.4 (ASAE, 2004). Approximately 100 g of extrudates from each blend were manually sieved (ASTM E-11, Daigger, Vernon Hills, IL) for about 10 s to remove initial fines, and then tumbled in a pellet durability tester (Model PDT-110, Seedburo Equipment Company, Chicago, IL) for 10 min. Afterwards, the samples were again hand sieved for about 10 s, and then weighed on an electronic balance (Explorer Pro, Model. EP4102, Ohaus, Pine Brook, NJ). PDI was calculated as:

$$PDI = \left(\frac{M_a}{M_b} \right) \times 100 \quad (8)$$

where *M_a* is the mass (g) after tumbling and *M_b* is the sample mass (g) before tumbling.

Water Absorption and Water Solubility Index

Water absorption index (WAI) and water solubility index (WSI) were measured according to the method of Anderson et al. (1969) and Jones et al. (2000). Extrudate sample of each treatment combination were ground with a cyclone mill (Cyclone Sample Mill, Model 3010-830, UDY Corporation, Fort Collins, CO) to an average particle size of about 500 µm. Approximately 2.5 g of the extrudate

powder was suspended with 30 mL of water in a tarred 50 mL centrifuge tube. The tube was placed in a laboratory oven (Thelco Precision, Jovan, Winchester, VA) at 30°C and stirred periodically every 10 min for 30 min. Afterwards, the water-extrudate suspension was centrifuged for 15 min at 3000 rpm in a laboratory-scale centrifuge (Duraforce 100, Precision, Winchester, VA). The supernatant was decanted into tarred aluminum dishes and dried for 2 h at 135°C in the laboratory oven. The ratio of the remaining gel mass in the centrifuge tube to the original sample mass (approximately 2.5 g) was used to determine the water absorption index:

$$WAI (-) = \left(\frac{W_g}{W_s} \right) \quad (9)$$

where W_g is gel weight (g) and W_s is the original sample weight (g).

WSI was calculated as the ratio of the dry solids (remaining from evaporation of the supernatant from the WAI test) to the original sample mass, following AACC Method 44-19 (2000).

$$WSI (\%) = \left(\frac{W_{ds}}{W_s} \right) \times 100 \quad (10)$$

where W_{ds} is the dry weight of the supernatant (g) and W_s is original weight of the sample (g).

Water Stability

Water stability is defined as the amount of time that it takes for an extrudate to begin to break apart after it has been placed in water. For extrudates of each blend, a 1 g sample was placed in 200 mL of distilled water and gently stirred using a magnet stirrer (PMC No. 524C, Barnstead International, Dubuque, IA) until the extrudates began to visibly dissolve, and the time was then recorded.

Color

A spectrophotometer (LabScan XE, HunterLab, Reston, VA) was used to determine extrudate color, where L quantified brightness/darkness, a redness/greenness, and b yellowness/blueness of the samples. Likewise, the color was tested on the raw material blends.

Statistical Analysis

Each blend was extruded once. For each treatment combination, three replicates ($n=3$) were analyzed for physical properties. All collected data were analyzed with Microsoft Excel v.2007 and SAS v.9 (SAS Institute, Cary, NC). The Proc GLM (general linear models) procedure was used to identify the main effects (i.e., individual effects of levels of DDGS, soybean meal, moisture content, die dimension, barrel temperature profile, screw speed or screw compression ratio) and treatment (simultaneous) combination effects using a Type I error rate (α) of 0.05. Then, post-hoc LSD tests were used to

determine where the specific differences occurred. TableCurve 3D v.4.0.01 (SYSTAT Software, Inc., San Joes, CA) was also used for response surface modeling.

Results and Discussion

Extrusion Processing Parameters

Temperature

Temperature settings were adjusted in the beginning of each extrusion run to the desired value. However, throughout processing, temperatures within the different zones fluctuated and were adjusted by changing the temperature and using an external fan when temperature increased more than 5°C. The rises in temperature were as expected, due to frictional heating and shear forces in the barrel during extrusion processing. This was due to the design of the extruder (i.e. the conveying mechanism of the flighted screw, the viscous properties of the raw material, and the grooved walls that reduce slip and cause friction) (Harper, 1981).

Die Pressure

The barrel of the extruder acts as a pressure cooker, where steam and pressure are released at the die opening (Harper, 1981). The design of the die can result in additional pressure. Die pressure and temperature highly affect expansion and mass flow. At lower temperatures and lower pressures, less water evaporates and causes less expansion. Hence, moisture content and screw speed are important factors that affect die pressure and extrudate expansion.

With changes in screw speed, no significant differences were detected for the die pressure for the main effects (Table 4). This may be related to the high standard deviations. Generally, all standard deviations for the recorded parameters for processing conditions (SME, torque, viscosity) were high. The highest value for die pressure was recorded at 1603.00 psi (Run 4), while the lowest value was at 42.50 psi (Run 15) (Table 5). As expected, the die pressure decreased with higher moisture content. This is in agreement with other extrusion studies (Lin et al., 2002; Meng et al., 2010; Singh et al., 2007). At high moisture the free water can act as a lubricant (Hayashi et al. 1993) and may reduce friction of the extruded dough which in turn decreases die pressure (Lin et al., 2002). This is reflected in the values for the water activity which increased with higher moisture content. The data for water activity varied between 0.62-0.66, 0.74-0.77, and 0.78-0.80 for 20, 30, and 40% moisture content (Table 3). Raising the processing temperature from 100 to 140°C resulted in a significant decrease in die pressure of 43.2% (Table 4). Similar results were reported by other investigators (Fletcher et al., 1985; Kirby et al., 1988; Singh et al., 2007). Furthermore, the die pressure showed a significant decrease with a larger die diameter of the die. The die pressure dropped by 46.0% by decreasing the die L/D from 13 to 5 (Table 4). This is in agreement with other observations (Sokhey et al., 1997) and was expected due to an increasing

die diameter. Increasing the DDGS level from 20 to 40% yielded a drop in pressure by 31.4%. Likewise, a similar trend was observed by Chevanan et al. (2010). Changes due to increasing DDGS, MC, temperature, and die diameter resulted in significantly lower die pressure values.

Torque

Torque quantifies the force that is required to rotate the extruder screw. Thus, it is affected by the viscosity of the dough, moisture content, temperature, and screw speed (Akdogan, 1996). High torque requires more energy and can lead to wear of the extruder. Optimal torque values can save energy and reduce stress on the equipment.

Regarding the main treatment effects, no clear pattern of changes in torque could be observed, which again might be related to the high standard deviations. The highest torque value was recorded for run 13 at 51.73 N·m, whereas the lowest was recorded for run 8 at 8.26 N·m (Table 5). Some significant differences in torque were detected with changes in DDGS and raw MC (Table 5). The torque decreased with higher levels of DDGS and higher moisture content. Changes in screw speed yielded no significant differences in torque for the main effects, which was related to the high standard deviations. But the dough did exhibit shear thinning behavior: the apparent viscosity decreased significantly by 42.2% when increasing the screw speed from 100 to 200 rpm (Table 4). However, the different screw configurations also had a significant effect on torque. This was as expected, due to the changes in flight height of the screw which increased compression and thus torque for the 2:1 compression ratio screw.

Mass flow rate

A common way to conclude about the productivity of an extruder is to measure its output. Previous studies have shown that the amounts of extrudate produced per unit time is impacted by screw speed, die geometry, shear rate, diet formulation, (such as DDGS level), moisture content, and the viscosity of the dough melt (Chevanan et al., 2008; Kannadhasan et al., 2010). In this study, except for screw speed, none of the independent variables had significant effects on MFR for the main effects, which again can be related to the high standard deviations. The highest MFR was detected for run 3 at 225.60 g/min, while the lowest was for run 8 at 67.13 g/min (Table 5). For the main effects, with increasing screw speed from 100 to 150 rpm, MFR increased significantly by 109.8% (Table 4).

Apparent Viscosity

All independent variables had some significant effects on the apparent viscosity as observed by the main and treatment effects (Tables 4 and 5). Standard deviations for the apparent viscosity were very high due to varying data; values for apparent viscosity ranged between 424.44 and 3565.88 Pa.s. For the main effects (Table 4), with increasing DDGS content, temperature, screw speed, and screw compression, decreases in apparent viscosity were observed. Raising the DDGS level from 20 to 40% yielded a decrease in apparent viscosity by 43.3%. Similar results were observed by Kannadhasan et al.

(2009b). Compared to soybean meal, DDGS has higher fiber content and less starch. Increasing the DDGS content in the blends, while reducing the amounts of SBM, changed the chemical composition and the potential functionality of the ingredients in the dough, thus affecting the apparent viscosity (Chevanan et al., 2010). A decrease in apparent viscosity by 22.3% was observed as the die zone temperature was raised from 100 to 140°C; this result can be supported by findings reported by Kannadhasan et al. (2009b) and Chevanan et al. (2010). Likewise, previous studies reported that increasing the temperature resulted in a decrease in viscosity (Launay and Lisch, 1983; Senouci and Smith, 1988). The reduced viscosity can be related to gelatinization, protein denaturation, chemical and structural transformations, respectively. Changes due to higher moisture content were curvilinear and showed a significant difference only when increasing MC from 30 to 40%, specifically a reduction of 51.2%. Similar findings were made by Chevanan et al. (2007a, 2010), who assumed that this behavior was caused by competing interactions between moisture content and other independent variables. Increasing the screw speed from 100 to 150 and 200 rpm had significant effects on all recorded values for the apparent viscosity, and yielded an overall decrease by 42.3%. These recordings are similar to observations made by other researchers (Kannadhasan et al., 2009b), and we can assume that the dough was pseudoplastic. On the other hand, an increase in viscosity by 36.9% was observed when increasing the die L/D ratio from 5 to 13. Chevanan et al. (2007a) made similar observations. With changes in die L/D ratio, only the die diameter changed, whereas the length stayed the same. With a smaller die diameter, pressure and shear increased and led to an increase in viscosity. Increasing the screw compression led to an increase in apparent viscosity by 33.3%, and was related to an increase in shear.

Specific Mechanical Energy

Specific mechanical energy consumption quantifies the net energy that is required to convey the material through the extruder per unit rate of flow. For the main effects, no clear pattern of changes could be observed with varying levels of the independent variables, which again can be related to the high standard deviations. The highest SME was detected at 1449.40 J/g (Run 13) and the lowest at 297.70 J/g (Run 8; Table 5). Only with increasing DDGS levels did SME show some significant decrease (Table 4). Although most of the independent variables appeared not to have significant effects, increasing the screw speed and compression ratio of the screw yielded an increase and decrease in SME by 25.4% and 14%, respectively. As temperature profile and L/D ratio increased, SME exhibited curvilinear behavior.

Extrudate Physical Properties

Moisture Content

The moisture content of the raw blends had one of the most important impacts on almost all extrudate physical properties and their cohesiveness (Table 4). Previous studies have shown that extrudate MC increased with higher DDGS levels (Ayadi et al., 2010b; Kannadhasan et al., 2010) and higher MC of the raw blends (Kannadhasan et al., 2009b; Rosentrater 2009b). In this study, extrudate MC

decreased significantly (by 8.8%) when raising the DDGS content of the blends from 20 to 30%, whereas MC did not show significant differences when increasing the DDGS level from 30 to 40%. Regarding the other independent variables, only some differences occurred for the extrudate MC with changing treatment combinations, except for increases with higher initial MC (Table 6). Extrudate MC increased by 13.0% when increasing MC of the raw blends from 20 to 40%. Increases with higher initial MC were as expected due to the higher water content of the raw blends. The difference between initial and final MC can be caused by greater flashing of moisture during exiting the die. Also, using the 3:1 screw (with a higher compression ratio) yielded higher extrudate MC by 21.3%. The highest value for extrudate MC was 12.01% (Run 16) and the lowest was 7.24% (Run 1) (Table 6).

Water Activity

Water activity measures the free water that is unbound in the material and can be available for microorganisms such as bacteria, moulds, and yeast. A critical a_w exists for every microorganism below which growth is inhibited. In contrast to bacteria, yeasts and molds can reproduce at lower a_w . Generally, water activity below 0.60 sufficiently restricts microbial growth and reduces the risk of deterioration (Chirife and Del Pilar Buera, 1994; Lowe and Kershaw).

Regarding the main effects, standard deviations for the raw blends were relatively low and significant differences occurred only with higher moisture content levels. Water activity increased by 25.4% when raising the moisture content from 20 to 40%. Significant differences for the extrudates occurred only with different screw configuration: a_w decreased by 19.6% from 0.46 to 0.37 when increasing the compression ratio of the screw (Table 4). Water activity for the raw material ranged between 0.62 and 0.80 (Table 3) and between 0.35 and 0.47 for the final product.

As for moisture content, water activity of the extrudate did not exhibit any significant differences due to processing conditions or ingredient composition, except for different screw configuration. In contrast to the MC of the resulting extrudates, water activity increased significantly with a lower screw compression (of 2:1) (table 4).

Bulk Density

Bulk density is an important parameter for the design of storage vessels. It influences the required storage space for the processing plant or shipping (Guy, 2001). High values for BD imply a higher capacity of extrudates which can be stored in a container. Bulk density varied between 175.04 and 267.39 kg/m³ for the extrudates (Table 6). Concerning the main effects (Table 4), some significant differences were detected with varying moisture content, screw speed, and die L/D ratio. A significant decrease for BD by 13.5% was detected when increasing MC from 30 to 40%. Raising the screw speed from 100 to 150 rpm resulted first in a decrease in BD by 7.0%, and then in an increase by 11.0% when increasing the screw speed from 150 to 200 rpm. Bulk density decreased by 14.4% with a higher L/D ratio of the die; a significant differences was observed between the highest and lowest die L/D ratio (Table 6).

Unit Density

Unit density quantifies the density of a single extrudate. In aquafeeds, unit density is considered a key parameter for the floatability of the feeds. For certain fish species, such as Nile tilapia, floatability is recommended since they tend to feed close to the water surface. Extrudates that sink to the bottom of the tank may not be eaten and present potential feed loss and contamination of the water. Additionally, floating feed can show how much feed is consumed by fish and indicate changes in feeding behavior.

Unit density ranged from 925.42 to 1389.22 kg/m³ (Table 6). The main effects of each independent variable on the unit density of the extrudates are presented in table 4. For some of the response variables, significant differences were detected. Increasing SBM content of the blend, screw speed and screw compression ratio had no significant impacts on the unit density values of the extrudates. Increasing DDGS from 20 to 30% and temperature profile from 120 to 140°C decreased the UD by 6.7% and 7.5%, respectively. As the L/D of the die was increased from 9 to 13, unit density resulted in an increase by 9.1%. With increases in moisture content from 20 to 40%, unit density of the extrudates increased by 16.0%, while expansion ratio decreased significantly. As reported by other studies, unit density is related to expansion ratio, which in turn is affected by the moisture content of the feed blend (Ding et al., 2005; Fang and Hanna, 2000), which was supported by our results.

Expansion Ratio

Generally, expansion ratio is inversely related to the unit density. In this study, expansion ratio only relates to the radial expansion (neglecting longitudinal and volumetric expansion), whereas unit density includes expansion in all directions. Expansion ratio varied between 0.53 and 1.05 within the treatment effects (Table 6). Significant differences were detected for most of the response variables. Expansion ratio significantly decreased by 22.2% with increasing moisture content from 20 to 40% and by 10.5% with increasing temperature from 100 to 140°C (Table 4). This conforms to the changes for the unit density, which increased with higher moisture content and higher temperature settings. Temperature impacts the rheological properties of the dough inside the extruder and thus, expansion ratio (Meng et al., 2010). Higher moisture reduces the viscosity of the melt and can act as a plasticizer, decreasing expansion ratio. With increasing screw speed (100 to 200 rpm), expansion ratio increased by 13.1%, and with higher die L/D ratio (5 to 13), ER increased significantly by 17.1%. Expansion ratio increased with lower die diameter. This is in agreement with Sokhey et al. (1997) who determined that extrudate radial expansion significantly decreased with increasing die diameter when extruding yellow corn grits. Meng et al. (2010) also observed that increased screw speed led to increased expansion ratio.

Pellet Durability Index

Extruded feed should survive transportation and storage without breaking or major crumbling. Pellet durability index is a key factor that measures extrudates' ability to withstand destructive forces. Pellet durability index ranged from 86.49 to 98.99% (Table 6). Regarding the main effects, a significant

difference was observed when increasing MC level from 30 to 40%; PDI increased by 3.3%. Increasing the moisture content from 20 to 40% yielded an increase in PDI by 6.0% (Table 4). Similar observations due to moisture were likewise made in previous studies (Chevanan et al. 2008, 2009). This can be explained by the composition of the blends, which were low in starch and high in protein. Protein plasticizes under heat and will act as a binder when exposed to shear forces, heat, and moisture. No significant changes occurred with increasing DDGS levels, as observed in previous studies (Ayadi et al. 2009; 2010a). Significantly reduced PDI was observed at the lowest die L/D ratio. This could be ascribed to nearly no expansion of the extrudate.

Water Absorption Index

Water absorption index (WAI) represents the hydrophilic aspect of blend formulation, while WSI is considered a measure of hydrophobic behavior (Ravindran et al., 2011). Starch-based materials have the ability to absorb water when the starch granules are damaged (Colonna et al., 1989). In this case, formulations were primarily protein-based. The blends used in these studies had low starch contents, which is reflected in the low WAI values, ranging between 2.77 and 3.90% (Table 6). The low starch content of the blends also did not induce drastic changes in WAI due to the independent variables. Increasing the DDGS content from 20 to 40% and SBM from 30 to 50%, yielded a decrease in WAI by 9.5% and 7.9%, respectively, while an increase in temperature from 100 to 140°C yielded an increase by 8.5%. The increase in WAI by higher temperatures can be related to the destruction of the crystalline structure of the starch that can absorb more water. Other researchers made similar observations for WAI with increasing temperature and DDGS content, respectively, when extruding DDGS-based feeds (Chevanan et al., 2007a, 2007b; Kannadhasan et al., 2009b; Shukla et al., 2005). Increases in DDGS and SBM reduced the WAI of the blends due to less available starch that can be gelatinized. The die geometry also had some effect on WAI: a higher L/D ratio (from 5 to 13) resulted in an increase in WAI by 10.9%. This might be due to the increased expansion and thus destruction of starch granules. Increasing the screw compression from 2:1 to 3:1 showed a significant difference in WAI by 7.2% (Table 4). This can be related to a higher compression that increased shear and frictional forces, which resulted in a higher starch granule destruction.

Water Solubility Index

Referring to Kirby et al. (1988), WSI can be related to the macromolecular degradation of starch. It is a measure of soluble polysaccharides that are cleaved by degradation of the starch granules (Ding et al., 2005). Water solubility index ranged from 17.43 to 22.72% (Table 6). Regarding the main effects, only some significant differences were detected (Table 4). Increasing the DDGS level from 20 to 40%, SBM level from 30 to 50%, and die L/D ratio from 5 to 13, yielded a decrease in WSI by 5.2%, 2.8% and 5.0%, respectively. Similar results for WSI with increases in DDGS level were observed in previous studies (Chevanan et al., 2007a; Kannadhasan et al., 2010). Extrusion cooking denatures proteins and releases

hydrophobic amino acids that reduce solubility in water (Camire, 1991). With increasing moisture content (20 to 40%) and temperature settings (100 to 140°C), WSI showed a curvilinear behavior. It increased by 3.5% when raising MC from 20 to 30%, while it decreased significantly by 4.4% when MC increased from 30 to 40%; similar observations with increasing MC were made by Rosentrater et al. (2009b).

Water Stability

The time an extrudate needs to dissolve in water indicates availability of feed for fish, loss of nutrients, and potential water pollution. Maintaining cohesive extrudates, once they are exposed to water is crucial. Water stability varied between 7.83 min and 30 min for all treatment combinations (Table 6). Only some significant differences were detected for the main effects (Table 4). This can be ascribed to the high standard deviations. Increases in MC from 20 to 40% yielded an increase in WS by 57.5%. As for PDI, this behavior can be related to the protein denaturation that is impacted by MC. Blends with lower MC were more expanded and absorbed water faster. With a higher die L/D ratio (from 5 to 13), WS decreased significantly by 26.3%.

Color

The values for brightness (Hunter L) of the extrudates varied from 35.55 to 49.40 (Table 6), whereas the brightness of the raw materials varied from 51.57 to 62.43 (Table 3). For the main effects, significant differences for the raw blends occurred only with increasing moisture content; brightness decreased by 9.8% when increasing the moisture content from 20 to 40%. For the extruded material, brightness decreased significantly by 13.0% with a higher die L/D ratio.

For redness (Hunter a), values ranged between 3.63 and 6.45 for the raw material and between 3.21 and 6.92 for the extruded material. Regarding the main effects, redness of the unprocessed blends showed significant differences only with higher DDGS levels and higher moisture content. Redness increased by 26.7% when raising the DDGS content from 20 to 30% and by 28.0% when increasing the moisture content from 20 to 30%. Similar changes were observed for yellowness (Hunter b). The values for yellowness ranged between 18.59 and 21.43 for the raw blends and between 9.60 and 16.56 for the extruded blends (Table 3 and 6). Increasing the DDGS amounts of the raw blends from 20 to 40%, yielded a significant increase of 7.8% for yellowness. Increasing the moisture content from 20 to 40% yielded an increase of 6.5% (Table 4).

Changes for the raw blends due to the DDGS content can be related to the initial yellow brownish color of DDGS.

Conclusions

This experiment was conducted to study the effects of various levels of DDGS, SBM, MC, die temperature, screw speeds, die L/D ratio, and screw configuration on extrusion processing conditions and extrudate physical properties. Moisture content and die dimension significantly affected most of the extrudate physical properties. The pressure at the die decreased significantly with higher die temperature, lower die L/D ratio, and higher screw compression, whereas the specific mechanical energy showed significant decrease only with higher DDGS content. The mass flow rate exhibited a significant increase with higher screw speed. Color and water activity of the raw materials were only affected by moisture content and by DDGS content. Overall, it can be concluded that all independent variables had significant effects on certain dependent parameters, while others did not. Changes of particular extruder and die settings, moisture content, and DDGS levels had significant effects on certain processing conditions and extrudate physical properties, and can be modified using various combinations thereof.

Acknowledgements

The authors thank the Agricultural Experiment Station, South Dakota State University, and the North Central Agricultural Research Laboratory, USDA-ARS, Brookings, South Dakota, for funding, facilities, equipment and supplies.

References

- Akdogan, H. 1996. Pressure, torque, and energy responses of a twin screw extruder at high moisture contents. *Food Research International* 29 (5-6): 423-429.
- ATA. 2010. American Tilapia Association. Available at: <http://ag.arizona.edu/azaqua/ata.html>. Accessed: 15 November 2010.
- Ayadi, F.Y., K. Muthukumarappan, K.A. Rosentrater, and M.L. Brown. 2009. Single screw processing of distillers dried grains with solubles (DDGS)-based yellow perch (*Perca flavescens*) feeds. ASABE Paper No SD09-702. St. Joseph, MI: American Society of Agricultural and Biological Engineers.
- Ayadi F.Y., K. Muthukumarappan, K.A. Rosentrater, and M.L. Brown. 2010a. Twin-screw extrusion processing of distillers dried grains with solubles (DDGS)-based rainbow trout feeds (*Oncorhynchus mykiss*). Paper No 1008337. St. Joseph, MI: American Society of Agricultural and Biological Engineers.
- Ayadi F.Y., K.A. Rosentrater, K. Muthukumarappan, and M.L. Brown. 2010b. Twin-screw extrusion processing of distillers dried grains with solubles (DDGS)-based yellow perch (*Perca flavescens*) feeds. Paper No 1008336. St. Joseph, MI: American Society of Agricultural and Biological Engineers.
- Ayadi F.Y., K.A. Rosentrater, K. Muthukumarappan, 2010c, A review of alternative protein sources in aquaculture feeds. Paper No 142. St. Joseph, MI: American Society of Agricultural and Biological

- Engineers. Bahnasawy, M.H. 2009. Effect of dietary protein levels on growth performance and body composition of monosex Nile tilapia, *Oreochromis niloticus* L. reared in fertilized tanks. *Pakistan Journal of Nutrition* 8 (5): 674-678.
- Bahnasawy, M.H. 2009. Effect of dietary protein levels on growth performance and body composition of monosex Nile tilapia, *Oreochromis niloticus* L. reared in fertilized tanks. *Pakistan Journal of Nutrition* 8 (5): 674-678.
- Bureau, D.P., A.M. Harris, D.J. Bevan, L.A. Simmons, P.A. Azevedo, and C.Y. Cho. 2000. Feather meals and meat and bone meals from different origins as protein sources in rainbow trout (*Oncorhynchus mykiss*) diets. *Aquaculture* 181 (3-4): 281-291.
- Camire, M.E. 1991. Protein functionality modification by extrusion cooking. *Journal of the American Oil Chemists' Society* 68 (3): 200-205.
- Cheng, Z.J. and R.W. Hardy. 2004. Nutritional value of diets containing distiller's dried grain with solubles for rainbow trout, *Oncorhynchus mykiss*. *Journal of Applied Aquaculture* 15 (3/4): 101-113.
- Chevanan, N., K. Muthukumarappan, K.A. Rosentrater, and J.L. Julson. 2007a. Effect of die dimensions on extrusion processing parameters and properties of DDGS-based aquaculture feeds. *Cereal Chemistry* 84(4): 389-398.
- Chevanan, N., K.A. Rosentrater, and K. Muthukumarappan. 2007b. Twin-screw extrusion processing of feed blends containing distillers dried grains with solubles (DDGS). *Cereal Chemistry* 84 (5): 428-436.
- Chevanan, N., K. Muthukumarappan, and K.A. Rosentrater. 2007c. Neural network and regression modeling of extrusion processing parameters and properties of extrudates containing DDGS. *Transactions of the ASABE* 50 (5): 1765-1778.
- Chevanan, N., K.A. Rosentrater, and K. Muthukumarappan. 2008. Effect of DDGS, moisture content, and screw speed on physical properties of extrudates in single-screw extrusion. *Cereal Chemistry* 85 (2): 132-139.
- Chevanan, N., K. Muthukumarappan, and K.A. Rosentrater. 2009. Extrusion studies of aquaculture feed using distillers dried grains with solubles and whey. *Food and Bioprocess Technology* 2 (2): 177-185.
- Chevanan, N., K.A. Rosentrater, and K. Muthukumarappan. 2010. Effects of processing conditions on single screw extrusion of feed ingredients containing DDGS. *Food and Bioprocess Technology* 3 (1): 111-120.
- Chirife, J. and M. del Pilar Buera. 1994. Water activity, glass transition and microbial stability in concentrated/semi moist food systems. *Journal of Food Science* 59 (5): 921-927.
- Colonna, P., J. Tayeb, and C. Mercier. 1989. In *Extrusion Cooking*. C. Mercier, P. Linko, J.M. Harper, eds. St. Paul, MN: American Association of Cereal Chemists, Inc, pp. 247-318..

- Ding, Q.-B., P. Ainsworth, G. Tucker, and H. Marson. 2005. The effect of extrusion conditions on the physicochemical properties and sensory characteristics of rice-based expanded snacks. *Journal of Food Engineering* 66 (3): 283-289.
- El-Sayed, A.-F.M. and S.-i. Teshima. 1992. Protein and energy requirements of Nile tilapia, *Oreochromis niloticus*, fry. *Aquaculture* 103 (1): 55-63.
- Fang, Q. and M.A. Hanna. 2000. Functional properties of polylactic acid starch-based loose-fill packaging foams. *Cereal Chemistry* 77 (6): 779-783.
- FAO. 2010. Species Fact Sheets. Fisheries and Aquaculture Department. Available at: <http://www.fao.org/fishery/species/3217/en>. Accessed: 15 November 2010.
- Fitzsimmons, K. 2006. Prospect and potential for global production. In *Tilapia: Biology, Culture, and Nutrition*. C. Lim and C.D. Webster, eds. Binghamton, NY: The Hawthorn Press, Inc, p. 51.
- Furuya, W.M., L.E. Pezzato, M.M. Barros, A.C. Pezzato, V.R.B. Furuya, and E.C. Miranda. 2004. Use of ideal protein concept for precision formulation of amino acid levels in fish-meal-free diets for juvenile Nile tilapia (*Oreochromis niloticus* L.). *Aquaculture Research* 35 (12): 1110-1116.
- Girish M. Ganjyal, Milford A. Hanna. 2004. Effects of Extruder Die Nozzle Dimensions on Expansion and Micrographic Characterization During Extrusion of Acetylated Starch. *Starch* 56 (3-4): 108-117.
- Guy, R. 2001. Extrusion Cooking: Technologies and Applications. Woodhead Cambridge, England: Publishing limited and CRC Press LLC, p. 89.
- Hafedh, Y.S. 1999. Effects of dietary protein on growth and body composition of Nile tilapia, *Oreochromis niloticus* L. *Aquaculture Research* 30 (5): 385-393.
- Harper, J. M. 1981. Extrusion of Foods, Vol. 1 & 2. Boca Raton, FL, USA: CRC Press Inc.
- Jones, D., R. Chinnaswamy, Y. Tan, and M.A. Hanna. 2000. Physiochemical properties of ready-to-eat breakfast cereals. *Cereal Foods World* 45 (4): 164-168.
- Kannadhasan, S., K. Muthukumarappan, and K.A. Rosentrater. 2009a. Effect of starch sources and protein content on extruded aquaculture feed containing DDGS. *Food and Bioprocess Technology* (in press). DOI: 10.1007/s11947-008-0177-4.
- Kannadhasan, S., K. Muthukumarappan, and K.A. Rosentrater. 2009b. Effects of ingredients and extrusion parameters on aquafeeds containing DDGS and tapioca starch. *Journal of Aquaculture Feed Science and Nutrition* 1(1): 6-21.
- Kannadhasan, S., K.A. Rosentrater, and K. Muthukumarappan. 2010. Twin screw extrusion of DDGS-based aquaculture feeds. *Journal of the World Aquaculture Society* 41 (51): 1-15.
- Kirby, A.R., A.-L. Ollett, R. Parker, and A.C. Smith. 1988. An experimental study of screw configuration effects in the twin-screw extrusion-cooking of maize grits. *Journal of Food Engineering* 8 (4): 247-272.

- Launay, B. and J.M. Lisch. 1983. Twin-screw extrusion cooking of starches: Flow behaviour of starch pastes, expansion and mechanical properties of extrudates. *Journal of Food Engineering* 2 (4): 259-280.
- Lim, C., J.C. Garcia, M. Yildirim-Aksoy, P.H. Klesius, C.A. Shoemaker, and J.J. Evans. 2007. Growth response and resistance to *Streptococcus iniae* of Nile tilapia, *Oreochromis niloticus*, fed diets containing distiller's dried grains with solubles. *Journal of the World Aquaculture Society* 38 (2): 231-237.
- Lim, C., M. Yildirim-Aksoy, and P.H. Klesius. 2009. Growth response and resistance to *Edwardsiella ictaluri* of channel catfish, *Ictalurus punctatus*, fed diets containing distiller's dried grains with solubles. *Journal of the World Aquaculture Society* 40 (2): 182-193.
- Lin, S., H.E. Huff, and F. Hsieh. 2002. Extrusion process parameters, sensory characteristics, and structural properties of a high moisture soy protein meat analog. *Journal of Food Science* 67 (3): 1066-1072.
- Lowe, J.A. and S.J. Kershaw. 1995. Water activity-moisture content relationship as a predictive indicator for control of spoilage in commercial pet diet components. *Animal Feed Science and Technology* 56 (3-4): 187-194.
- Meng, X., D. Threinen, M. Hansen, and D. Driedger. 2010. Effects of extrusion conditions on system parameters and physical properties of a chickpea flour-based snack. *Food Research International* 43 (2): 650-658.
- Metts, L.S., K.R. Thompson, Y. Xiong, B. Kong, C.D. Webster, and Y. Brady. 2007. Use of alfalfa hay, compared to feeding practical diets containing two protein levels, on growth, survival, body composition, and processing traits of Australian red claw crayfish, *Cherax quadricarinatus*, grown in ponds. *Journal of the World Aquaculture Society* 38 (2): 218-230.
- Njiru, M., J.B. Okeyo-Owuor, M. Muchiri, and I.G. Cowx. 2004. Shifts in the food of Nile tilapia, *Oreochromis niloticus* (L.) in Lake Victoria, Kenya. *African Journal of Ecology* 42 (3): 163–170.
- Pezzato, L.E. 1999. The use of extruded feed in fish food. In *Advances in Extrusion Technology: Aquaculture animal feeds and foods*. Y.K. Chang and S.S. Wang, eds. Lancaster, PA: Technomic Publishing Company.
- Ravindran, G., A. Carr, and A. Hardacre. 2011. A comparative study of the effects of three galactomannans on the functionality of extruded pea–rice blends. *Food Chemistry* 124 (4): 1620-1626.
- Rawles, S.D., T.G. Gaylord, M.E. McEntire, and D.W. Freeman. 2009. Evaluation of poultry by-product meal in commercial diets for hybrid striped bass, morone chrysops ♀ × Morone saxatilis ♂, in pond production. *Journal of the World Aquaculture Society* 40 (2): 141-156.
- Rawles, S.D., K.R. Thompson, Y.J. Brady, L.S. Metts, A.L. Gannam, R.G. Twibell, and C.D. Webster. 2010. A comparison of two faecal collection methods for protein and amino acid digestibility

- coefficients of menhaden fish meal and two grades of poultry by-product meals for market-size sunshine bass (*Morone chrysops* × *M. saxatilis*). *Aquaculture Nutrition* 16(1): 81 – 90.
- Rogers, M.G. 1970. Rheological interpretation of Brabender plasti-corder (extruder head) data. *Industrial and Engineering Chemistry* 9 (1): 49-52.
- Romana-Eguia, M.R.R., M. Ikeda, Z.U. Basiao, and N. Taniguchi. 2004. Genetic diversity in farmed Asian Nile and red hybrid tilapia stocks evaluated from microsatellite and mitochondrial DNA analysis. *Aquaculture* 236 (1-4): 131-150.
- Rosentrater, K.A., K. Muthukumarappan, and S. Kannadhasan. 2009a. Effects of ingredients and extrusion parameters on aquafeeds containing DDGS and potato starch. *Journal of Aquaculture Feed Science and Nutrition* 1 (1): 22-38.
- Rosentrater, K.A., K. Muthukumarappan, and S. Kannadhasan. 2009b. Effects of ingredients and extrusion parameters on properties of aquafeeds containing DDGS and corn starch. *Journal of Aquaculture Feed Science and Nutrition* 1 (2): 44-60.
- SAS. 1999. Windows NT Version 5.1.2600. Cary, NC: SAS Institute, Inc.
- Senouci A. and A. C. Smith, 1988. An experimental study of food melt rheology - I. Shear viscosity using a slit die viscometer and a capillary rheometer. *Rheologica Acta* 27 (5): 546-554.
- Shukla, C.Y., K. Muthukumarappan, and J.L. Julson. 2005. Effect of single-screw extruder die temperature, amount of distillers' dried grains with solubles (DDGS), and initial moisture content on extrudates. *Cereal Chemistry* 82 (1): 34-37.
- Singh, B., K.S. Sekhon, and N. Singh. Effects of moisture, temperature and level of pea grits on extrusion behaviour and product characteristics of rice. *Food Chemistry* 100 (1): 198-202.
- Sokhey, A.S., Y. Ali, M.A. Hanna. 1997. Effects of die dimensions on extruder performance. *Journal of Food Engineering* 31 (2): 251-261.
- Steffens, W. 1994. Replacing fish meal with poultry by-product meal in diets for rainbow trout, *Oncorhynchus mykiss*. *Aquaculture* 124 (1-4): 27-34.
- Thompson, K.R., S.D. Rawles, L.S. Metts, R. Smith, A. Wimsatt, A.L. Gannam, R.G. Twibell, R.B. Johnson, Y.J. Brady, and C.D. Webster. 2008. Digestibility of dry matter, protein, lipid, and organic matter of two fish meals, two poultry by-product meals, soybean meal, and distiller's dried grains with solubles in partial diets for sunshine bass, *Morone chrysops* X *M. saxatilis*. *Journal of the World Aquaculture Society* 39 (3): 352-363.
- USDA. 1999. Practical procedures for grain handlers: Inspecting grain. Washington, D.C.: Grain Inspection, Packers, and Stockyards Administration, United States Department of Agriculture. Available at: <http://archive.gipsa.usda.gov/pubs/primer.pdf>. Accessed 18 August 2010.
- USDA. 2010a. Byproduct feeds: Average wholesale price, bulk, specified markets. Feed Grains Data: Yearbook Tables. Washington, D.C.: USDA Agricultural Marketing Service. Available at:

<http://www.ers.usda.gov/Data/FeedGrains/Yearbook/FGYearbookTable16.pdf>. Accessed 27 October 2010.

- Wang, L., C. Chessari, and E. Karpiel. 2001. Inferential control of product quality attributes—application to food cooking extrusion process. *Journal of Process Control* 11 (6): 621-636.
- Webster, C.D. and C.E. Lim. 2002. Preface. In *Nutrient Requirements and Feeding of Finfish for Aquaculture*. Wallingford, Oxford: CABI Publishing.
- Webster, C.D., J.H. Tidwell, and L.S. Good game. 1993. Growth, body Composition, and organoleptic evaluation of channel catfish fed diets containing different percentages of distillers' grains with solubles. *The Progressive Fish-Culturist* 55 (2): 95-100.
- Wu, V.W., R.R. Rosati, and P.B. Brown. 1996. Effect of diets containing various levels of protein and ethanol coproducts from corn on growth of tilapia fry. *Journal of Agricultural and Food Chemistry* 44 (6): 1491-1493.
- Yusuf Ali, Milford A. Hanna and R. Chinnaswamy. 1996. Expansion Characteristics of Extruded Corn Grits. *Lebensmittel-Wissenschaft und-Technologie* 29 (8):702-707

Table 1. Ingredient components used in the study.

	Dry weight of ingredients (%)		
DDGS ¹	20	30	40
Soybean meal ²	50	40	30
Corn flour ³	15	15	15
Whey ⁴	5	5	5
Fishmeal ⁵	10	10	10
TOTAL	100	100	100

¹ Dakota Ethanol, LLC (Wentworth, SD)

² Dakotaland Feeds, LLC (Huron, SD)

³ Cargill Dry Corn Ingredients, Inc. (Paris, IL)

⁴ Midor Ltd (Elroy, WI)

⁵ Consumers Supply Distributing Co. (Huron, SD)

Table 2. Experimental design used in the study.*

Treatment	Fish meal	Screw compression ratio	Temperature profile	MC	Screw Speed	DDGS	Die L/D	SBM
	(%)	(-)	(°C)	(% db)	(rpm)	(%)	(-)	(%)
1	9.98	2:1	80-100-100	20	100	20	5	30
2	9.98	2:1	80-120-120	30	150	40	9	40
3	9.98	2:1	80-140-140	40	200	30	13	50
4	9.98	3:1	80-100-100	20	200	30	9	40
5	9.98	3:1	80-120-120	30	100	20	13	50
6	9.98	3:1	80-140-140	40	150	40	5	30
7	9.99	2:1	80-100-100	40	150	20	13	40
8	9.99	2:1	80-100-100	40	100	40	9	50
9	9.99	2:1	80-120-120	20	150	30	13	30
10	9.99	2:1	80-120-120	20	200	40	5	50
11	9.99	2:1	80-140-140	30	100	30	9	30
12	9.99	2:1	80-140-140	30	200	20	5	40
13	9.99	3:1	80-100-100	30	150	30	5	50
14	9.99	3:1	80-100-100	30	200	40	13	30
15	9.99	3:1	80-120-120	40	100	30	5	40
16	9.99	3:1	80-120-120	40	200	20	9	30
17	9.99	3:1	80-140-140	20	100	40	13	40
18	9.99	3:1	80-140-140	20	150	20	9	50

* The experimental design consisted of an L₁₈ Taguchi fractional factorial design with 18 total treatment combinations. MC is moisture content, die L/D is length to diameter ratio of the die, SBM is soybean meal.

Table 3. Physical properties of the raw feed blends.*

Property	Treatment																	
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
a_w	0.64g	0.74e	0.80a	0.66f	0.77d	0.78c	0.80ab	0.80ab	0.62h	0.62h	0.74e	0.74e	0.74e	0.74e	0.79b	0.80ab	0.62h	0.62h
(-)	(0.00)	(0.00)	(0.00)	(0.00)	(0.00)	(0.00)	(0.00)	(0.00)	(0.00)	(0.00)	(0.00)	(0.01)	(0.00)	(0.00)	(0.00)	(0.00)	(0.00)	(0.02)
L	62.43a	55.05de	54.04ef	56.76cd	51.57g	53.18fg	53.99ef	52.94fg	59.16b	58.23bc	57.30c	59.11b	57.30c	55.05de	54.04ef	53.99ef	58.23bc	62.43a
(-)	(0.82)	(1.37)	(1.33)	(0.93)	(1.11)	(0.84)	(0.61)	(0.46)	(2.08)	(1.19)	(0.55)	(0.92)	(0.55)	(1.37)	(1.33)	(0.61)	(1.19)	(0.82)
a	3.63g	5.63b	5.57b	4.54ef	5.38bc	6.24a	4.98d	6.45a	4.34f	5.13cd	4.86de	4.38f	4.86de	5.63b	5.57b	4.98d	5.13cd	3.63g
(-)	(0.18)	(0.10)	(0.35)	(0.31)	(0.33)	(0.18)	(0.21)	(0.19)	(0.16)	(0.07)	(0.13)	(0.07)	(0.13)	(0.10)	(0.35)	(0.21)	(0.07)	(0.18)
b	18.59g	20.71abc	20.49bcd	19.15efg	18.82fg	21.28ab	19.74de	21.43a	19.24efg	20.01cde	19.91cde	19.63def	19.91cde	20.71abc	20.49bcd	19.74de	20.01cde	18.59g
(-)	(0.47)	(0.45)	(0.72)	(0.91)	(0.97)	(0.42)	(0.33)	(0.32)	(0.59)	(0.36)	(0.32)	(0.22)	(0.32)	(0.45)	(0.72)	(0.33)	(0.36)	(0.47)

* Means followed by similar letters for a given dependent variable are not significantly different at $P < 0.05$, LSD. Values in parentheses are standard deviation. a_w is water activity, L is brightness, a is redness, b is yellowness.

Table 4. Main effects of DDGS, moisture content, SBM, temperature, screw speed, L/D die, barrel size, and screw configuration on raw blends, processing properties and extrudate physical properties.*

	Raw blends				Processing conditions					Extrudate properties											
Variable	a _{wRaw}	L _{raw}	a _{raw}	b _{raw}	P at Die	Torque	MFR	η _{app}	SME	MC	a _w	BD	UD	ER	PDI	WAI	WSI	WS	L	a	b
	(-)	(-)	(-)	(-)	MPa	(N·m)	(g/min)	(Pa·s)	(J/g)	(% db)	(-)	(kg/m ³)	(kg/m ³)	(-)	(%)	(%)	(-)	(min)	(-)	(-)	(-)
DDGS (% db)																					
20	0.73a	57.25a	4.50c	19.19c	932.04a	29.14a	115.32a	1880.83a	860.90a	9.74a	0.41a	217.52a	1193.36a	0.90a	94.00a	3.37a	19.20a	20.73a	44.09a	3.94b	12.76b
	(0.07)	(4.48)	(0.72)	(0.70)	(484.21)	(11.98)	(31.43)	(1094.42)	(367.52)	(1.82)	(0.04)	(27.80)	173.46	(0.08)	(4.04)	(0.26)	(0.96)	(7.76)	(5.05)	(0.49)	(2.27)
30	0.73a	56.43a	4.96b	19.86b	790.56ab	30.41a	129.67a	1637.52a	716.52ab	8.88b	0.41a	218.29a	1113.23b	0.8a	94.94a	3.24ab	19.61a	20.39a	42.27a	4.77a	14.55a
	(0.07)	(2.17)	(0.53)	(0.76)	(580.72)	(17.13)	(56.00)	(783.61)	(423.89)	(0.85)	(0.04)	(29.38)	(149.53)	(0.18)	(4.71)	(0.35)	(1.60)	(10.19)	(4.31)	(0.73)	(1.94)
40	0.72a	55.45a	5.70a	20.69a	639.02b	18.43b	111.58a	1067.25b	513.44b	9.00ab	0.39a	221.61a	1136.07b	0.89a	94.85a	3.05b	18.20b	22.22a	41.91a	5.17a	14.43a
	(0.08)	(2.38)	(0.53)	(0.65)	(302.58)	(11.10)	(51.14)	(648.75)	(210.87)	(0.83)	(0.04)	(18.46)	(138.99)	(0.16)	(4.36)	(0.31)	(0.79)	(6.33)	(3.62)	(1.01)	(1.83)
MC (% db)																					
20	0.63c	59.54a	4.40c	19.27c	1220.75a	28.17a	106.14a	1686.17a	624.98b	8.79b	0.41a	231.54a	1079.30b	0.99a	91.96b	3.17a	18.85ab	17.44b	45.39a	5.06a	15.54a
	(0.02)	(2.46)	(0.65)	(0.76)	(346.90)	(10.49)	(35.13)	(721.03)	(186.87)	(1.23)	(0.05)	(26.40)	(112.87)	(0.06)	(5.00)	(0.27)	(0.97)	(6.67)	(3.25)	(1.09)	(1.16)
30	0.75b	55.90b	5.12b	19.95b	602.00b	32.29a	133.67a	1948.87a	929.56a	8.89b	0.40a	228.40a	1111.20b	0.92b	94.34b	3.31a	19.51a	18.42b	44.62a	4.61ab	14.47b
	(0.01)	(2.61)	(0.49)	(0.80)	(312.52)	(16.94)	(44.99)	(1125.72)	(505.40)	(0.99)	(0.04)	(16.86)	(163.39)	(0.09)	(3.66)	(0.38)	(1.73)	(7.91)	(3.53)	(0.70)	(1.42)
40	0.79a	53.70c	5.63a	20.53a	538.88b	17.52b	116.76a	950.55b	536.33b	9.93a	0.40a	197.47b	1252.17a	0.77c	97.49a	3.18a	18.65b	27.47a	38.27b	4.22b	11.73c
	(0.01)	(0.91)	(0.62)	(0.80)	(446.25)	(11.55)	(57.15)	(504.72)	(208.11)	(1.36)	(0.03)	(15.96)	(136.32)	(0.17)	(1.84)	(0.34)	(0.93)	(5.87)	(2.17)	(0.76)	(1.70)
SBM (% db)																					
30	0.72a	56.85a	4.95a	19.91a	713.02a	22.08b	102.92a	1405.04b	606.10a	9.31a	0.41a	214.33a	1120.52a	0.86b	94.53a	3.28a	19.50a	21.22ab	42.22a	4.68ab	13.93a
	(0.07)	(3.44)	(0.88)	(0.98)	(523.26)	(10.16)	(34.69)	(898.54)	(220.73)	(1.57)	(0.04)	(16.14)	(156.47)	(0.16)	(4.73)	(0.39)	(1.77)	(9.94)	(3.65)	(1.01)	(2.52)
40	0.73a	56.20a	5.04a	19.96a	787.58a	24.54b	132.61a	1365.37b	673.92a	9.22a	0.40a	228.11a	1159.40a	0.86b	95.20a	3.35a	18.55b	17.34b	42.33a	4.94a	14.32a
	(0.07)	(2.24)	(0.52)	(0.71)	(576.56)	(13.36)	(49.13)	(624.69)	(360.37)	(1.44)	(0.04)	(31.62)	(164.02)	(0.17)	(3.07)	(0.25)	(0.92)	(6.74)	(3.90)	(1.06)	(2.24)
50	0.72a	56.09a	5.17a	19.88a	861.02a	31.36a	121.04a	1815.18a	810.84a	9.10a	0.40a	214.97a	1162.75a	0.95a	94.07a	3.02b	18.95ab	24.78a	43.71a	4.26b	13.50a
	(0.08)	(3.86)	(0.89)	(1.10)	(299.51)	(17.89)	(53.30)	(1124.53)	(471.29)	(0.78)	(0.04)	(24.46)	(150.75)	(0.07)	(5.06)	(0.26)	(0.88)	(5.71)	(5.48)	(0.49)	(1.64)
T (°C)																					
100	-	-	-	-	1002.50a	31.77a	121.83a	1774.88a	796.78a	9.034a	0.40a	221.36a	1160.89a	0.95a	94.47a	3.05b	18.95ab	23.42a	42.912a	4.68a	14.24a
	-	-	-	-	(463.65)	(15.90)	(40.82)	(860.92)	(399.40)	(1.42)	(0.05)	(30.00)	(142.38)	(0.06)	(4.86)	(0.26)	(1.09)	(7.08)	(5.09)	(0.74)	(2.10)
120	-	-	-	-	789.63b	22.90b	111.63a	1431.02ab	627.75a	9.64a	0.41a	219.75a	1185.14a	0.88b	94.59a	3.29a	18.59b	21.78a	42.83a	4.42a	13.48a
	-	-	-	-	(486.22)	(13.93)	(44.18)	(1105.86)	(326.42)	(1.46)	(0.04)	(19.24)	(155.36)	(0.18)	(5.05)	(0.26)	(0.88)	(7.57)	(2.98)	(0.86)	(2.40)
140	-	-	-	-	569.50c	23.31b	123.10a	1379.70b	666.34a	8.94a	0.40a	216.30a	1096.63b	0.85b	94.73a	3.31a	19.47a	18.14a	42.52a	4.79a	14.02a
	-	-	-	-	(399.99)	(12.28)	(56.84)	(728.32)	(375.58)	(0.85)	(0.04)	(26.49)	(163.00)	(0.16)	(2.99)	(0.41)	(1.69)	(9.13)	(5.02)	(1.13)	(1.98)
SS (rpm)																					
100	-	-	-	-	718.88a	23.18a	76.31c	1922.54a	612.02a	8.36b	0.41a	221.90ab	1127.91a	0.84b	94.78a	3.37a	19.29a	22.33a	42.30a	4.97a	14.22a
	-	-	-	-	(474.17)	(14.08)	(7.68)	(1129.17)	(344.64)	(0.81)	(0.04)	(11.70)	(209.27)	(0.16)	(3.98)	(0.39)	(1.84)	(9.07)	(3.52)	(1.03)	(1.51)
150	-	-	-	-	884.60a	27.97a	120.18b	1551.38b	710.81a	9.50a	0.40a	206.41b	1164.50a	0.89b	94.16a	3.09b	19.17a	20.08a	43.28a	4.47a	13.62a
	-	-	-	-	(481.08)	(15.72)	(41.49)	(812.55)	(397.06)	(1.09)	(0.04)	(19.77)	(138.73)	(0.16)	(4.47)	0.29	(0.83)	8.13	(4.84)	(0.74)	(2.13)
200	-	-	-	-	758.15a	26.83a	160.08a	1111.67c	768.04a	9.76a	0.40a	229.10a	1150.25a	0.95a	94.85a	3.19ab	18.55a	20.92a	42.69a	4.45a	13.90a
	-	-	-	-	(485.30)	(13.81)	(37.87)	(563.07)	(366.22)	(1.47)	(0.05)	(34.27)	(107.23)	(0.10)	(4.68)	(0.27)	(0.91)	(7.43)	(4.86)	(0.92)	(2.72)
Die L/D																					
5	-	-	-	-	544.81c	22.06b	103.08a	1345.70b	729.19a	9.25a	0.40a	233.02a	1082.70b	0.82c	91.35b	3.04b	19.53a	24.98a	45.76a	4.28b	14.38a
	-	-	-	-	(508.60)	(17.97)	(34.12)	(1115.82)	(531.36)	(1.13)	(0.04)	(21.60)	(125.34)	(0.22)	(4.39)	(0.27)	(0.59)	(7.81)	(4.58)	(0.47)	(1.41)
9	-	-	-	-	807.42b	25.43ab	127.83a	1397.26b	601.21a	9.10a	0.41a	224.97ab	1128.62b	0.90b	96.23a	3.24ab	18.92ab	19.94ab	42.69b	4.57ab	13.56a
	-	-	-	-	(466.37)	(13.41)	(47.60)	(654.04)	(223.36)	(1.49)	(0.04)	(22.20)	(142.74)	(0.06)	(1.89)	(0.39)	(1.97)	(8.38)	(3.41)	(0.89)	(2.40)
13	-	-	-	-	1009.40a	30.50a	125.66a	1842.63a	760.47a	9.26a	0.40a	199.42b	1231.35a	0.96a	96.21a	3.37a	18.56b	18.42a	39.82c	5.03a	13.80a
	-	-	-	-	(346.56)	(10.44)	(55.72)	(873.81)	(276.47)	(1.29)	(0.04)	(19.37)	(165.42)	(0.05)	(4.30)	(0.25)	(0.71)	(7.07)	(2.96)	(1.15)	(2.51)
Screw comp.																					
2:1	-	-	-	-	950.83a	32.05a	135.01a	1964.79a	769.13a	8.06b	0.46a	222.61a	1167.78a	0.88a	95.91a	3.07b	18.68a	24.56a	42.30a	4.41	13.54a
	-	-	-	-	(521.87)	(14.26)	(66.32)	(1085.34)	(269.57)	(0.56)	(0.01)	(29.52)	(150.54)	(0.15)	(3.85)	(0.24)	(0.83)	(6.26)	(4.47)	(0.67)	(1.98)
3:1	-	-	-	-	705.40b	22.97b	110.78a	1310.41b	660.87a	9.78a	0.37b	217.40a	1137.44a	0.90a	93.94a	3.29a	19.17a	19.39b	42.98a	4.74	14.10a
	-	-	-	-	(441.37)	(13.88)	(32.09)	(744.16)	(408.05)	(1.16)	(0.02)	(23.07)	(160.48)	(0.14)	(4.44)	(0.35)	(1.46)	(8.48)	(4.39)	(1.01)	(2.23)

* Means within a column followed by similar letters for a given dependent variable are not significantly different at P<0.05, LSD. Values in parentheses are standard deviation. MC is moisture content; SBM is soybean meal; T (°C) is temperature profile (100 is 80-100-100°C, 120 is 80-120-120, 140 is 80-140-140°C); SS is screw speed; die L/D is length to diameter ratio of the die; Screw Comp. is screw compression ratio; a_{wRaw} is water activity of raw material; L_{raw} is brightness/darkness of raw material; a_{raw} is redness/greenness of raw material; b_{raw} is yellowness/blueness of raw material; P is die pressure; MFR is mass flow rate; η_{app} is apparent viscosity; SME is specific mechanical energy; MC is moisture content; a_w is water activity of extrudate; BD is Bulk density of extrudate; ER is expansion ratio of extrudate; PDI is pellet durability index of extrudate; WAI is water adsorption index; WSI is water solubility index; L is brightness/darkness of extrudate; a is redness/greenness of extrudate; b is yellowness/blueness of extrudate.

Table 5. Treatment effects on the measured processing parameters.*

Property	Treatment																	
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
P at Die (psi)	1351.13b (299.12)	729.38ef (140.61)	746.63ef (247.56)	1603.00a (220.12)	1149.00c (111.55)	125.88kl (40.30)	1323.13b (86.09)	595.00fg (1124)	1435.25b (73.09)	98150d (236.63)	369.50ij (54.72)	22138jk (125.68)	546.50gh (65.85)	596.25fg (95.10)	42.50l (10.86)	400.13hi (110.14)	806.13e (218.26)	1147.50c (232.56)
Torque	3167bcd	26.81c-f	35.21b	44.05b	46.26a	8.26h	24.94def	8.59h	22.93ef	13.24gh	20.20fg	19.08fg	51.73a	29.66b-e	8.38h	19.76fg	23.99def	33.14bc
MFR (g/min)	74.90a (4.95)	186.80b (50.95)	225.60a (7.88)	172.60bc (2.03)	78.07g (0.64)	72.07g (5.16)	124.53de (3.29)	67.13g (2.19)	88.00fg (9.10)	105.73ef (4.01)	85.67fg (2.04)	159.67c (9.47)	130.60d (4.86)	16120c (0.53)	75.53g (2.23)	135.67d (3.83)	76.53g (14.45)	119.09de (4.09)
η_{app} (Pa-s)	2877.54b (205.99)	1623.54cd (763.30)	1599.64cd (429.84)	1697.67cd (67.92)	3565.88a (356.36)	424.44h (85.74)	1510.01cde (213.96)	762.06fgh (88.28)	1388.15de (288.26)	60136gh (199.37)	1835.30c (824.80)	866.54fg (678.28)	2658.80b (853.39)	1143.18ef (386.99)	645.54gh (6107)	76164fgh (343.18)	1848.94c (39146)	1703.35cd (26115)
SME (J/g)	755.96bcd (10.71)	582.70c-f (36.24)	784.55bcd (66.08)	830.24bc (18.24)	1250.33a (88.99)	4110.1def (75.12)	615.51c-f (59.62)	297.70f (3.35)	473.70c-f (46.00)	350.50ef (14.80)	408.10def (192.87)	1055.00ab (809.03)	1449.40a (469.37)	83180bc (252.57)	353.20ef (42.07)	756.00bcd (138.74)	606.90c-f (96.15)	732.50b-e (175.40)
T1 (°C)	80.75 (139)	78.63 (3.34)	81.25 (2.55)	79.38 (0.52)	80.75 (183)	78.80 (198)	79.25 (0.71)	79.75 (0.46)	80.25 (0.71)	80.00 (0.53)	80.00 (0.76)	82.13 (196)	82.13 (2.10)	8100 (2.51)	80.63 (0.74)	79.63 (0.52)	79.75 (0.71)	79.63 (0.52)
T2 (°C)	101.38 (0.91)	118.88 (0.35)	139.13 (0.83)	102.75 (4.50)	12100 (0.53)	140.25 (0.46)	99.75 (0.46)	100.00 (0.00)	122.50 (1.19)	119.38 (0.92)	140.00 (107)	133.00 (8.64)	100.88 (0.64)	96.88 (3.87)	122.38 (3.85)	119.63 (0.74)	139.88 (0.35)	138.00 (107)
T3 (°C)	103.00 (2.20)	119.00 (0.76)	141.38 (0.74)	102.75 (3.10)	123.13 (173)	143.50 (141)	99.50 (0.53)	100.00 (0.00)	12150 (131)	119.75 (0.46)	140.00 (0.00)	142.00 (4.41)	99.88 (0.35)	103.25 (2.05)	12188 (2.53)	120.00 (0.00)	139.88 (0.35)	140.63 (185)

* Means followed by similar letters for a given dependent variable are not significantly different at $P < 0.05$, LSD. Values in parentheses are standard deviation. P is pressure, MFR is mass flow rate, η_{app} is apparent viscosity, SME is specific mechanical energy, T1 is feed zone temperature, T2 is metering zone temperature, and T3 is die zone temperature.

Table 6. Treatment effects on extrudate physical properties.*

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
MC ext. (% db)	7.24k (0.09)	8.10i (0.05)	8.62gh (0.10)	7.67j (0.06)	7.88ij (0.11)	8.84fg (0.04)	11.43b (0.04)	9.27e (0.32)	10.12d (0.21)	10.28cd (0.32)	8.22hi (0.05)	10.54c (0.23)	9.19ef (0.29)	9.41e (0.58)	9.43e (0.31)	12.01a (0.45)	8.11i (0.12)	9.33e (0.13)
a _w (-)	0.47a (0.00)	0.45c (0.00)	0.44c (0.01)	0.47a (0.00)	0.46b (0.00)	0.45c (0.00)	0.38f (0.01)	0.37gh (0.00)	0.38fg (0.00)	0.37fgh (0.00)	0.39e (0.01)	0.37gh (0.00)	0.37gh (0.00)	0.35i (0.00)	0.38fg (0.00)	0.41d (0.00)	0.37fg (0.01)	0.36h (0.00)
ER (-)	0.94de (0.04)	0.91e (0.02)	0.94de (0.02)	0.99bc (0.03)	0.94de (0.02)	0.56g (0.03)	0.90e (0.01)	0.85f (0.02)	1.02ab (0.03)	1.05a (0.02)	0.82f (0.02)	0.84f (0.15)	0.99bc (0.01)	0.99bc (0.03)	0.53g (0.07)	0.85f (0.03)	0.97cd (0.06)	0.94de (0.05)
BD (kg/m ³)	241.22d (2.08)	230.81e (2.10)	177.10l (4.78)	267.39a (1.42)	215.98g (2.19)	203.16j (1.41)	175.04l (2.56)	209.17hi (3.11)	196.62k (3.36)	254.73c (0.66)	228.93ef (2.48)	259.34b (1.24)	228.85ef (0.74)	206.49ij (1.40)	210.82h (2.76)	209.55hi (0.28)	225.29f (0.40)	204.00j (1.89)
UD (kg/m ³)	1012.01ij (58.16)	1132.85e-h (51.00)	1254.34bcd (49.20)	1109.81e-i (50.00)	1329.95ab (200.92)	1170.72def (167.36)	1389.22a (65.73)	1257.15bcd (62.34)	182.74cde (55.12)	1023.55i (27.95)	925.42j (148.21)	1081.64f-i (43.24)	1045.62i (52.83)	1153.98efg (75.80)	1164.84d-g (198.15)	1279.89bc (80.01)	1080.48f-i (224.16)	1068.86ghi (46.30)
PDI (%)	87.79gh (0.20)	96.07a-e (0.11)	98.99a (0.17)	97.61abc (0.08)	97.95abc (0.01)	97.07a-d (0.05)	96.35a-e (4.60)	98.44ab (0.06)	92.93ef (8.71)	86.49h (0.30)	94.38b-f (2.29)	91.01fg (0.53)	88.70gh (0.76)	97.94abc (0.30)	97.04a-e (0.06)	97.07a-d (0.23)	93.11def (2.97)	93.83c-f (0.27)
WAI (-)	3.00i (0.01)	3.04ghi (0.04)	3.03hi (0.02)	3.05gh (0.02)	3.55d (0.01)	2.77k (0.02)	3.55d (0.01)	2.81k (0.02)	3.33f (0.00)	2.90j (0.01)	3.90a (0.02)	3.48e (0.06)	2.81k (0.00)	3.08g (0.06)	3.30f (0.01)	3.60c (0.01)	3.67b (0.01)	3.04ghi (0.01)
WSI (%)	20.10b (0.15)	17.72gh (0.40)	18.56efg (0.22)	17.98fgh (0.05)	18.64def (0.08)	19.05cde (0.50)	19.51bc (0.18)	17.73gh (0.55)	19.06cde (0.03)	19.10cde (0.71)	22.72a (0.09)	19.58bc (0.11)	20.24b (0.17)	18.16fgh (0.45)	19.10cde (0.22)	17.93fgh (1.72)	17.43h (0.16)	19.45bcd (0.45)
WS stir (min)	>30.00a (0.00)	19.67c (4.73)	>30.00a (0.00)	15.33de (0.58)	22.33b (2.52)	>30.00a (0.00)	14.83de (2.25)	>30.00a (0.00)	9.17f (1.04)	19.50c (0.87)	7.83f (1.53)	10.37f (1.10)	>30.00a (0.00)	20.33b (1.53)	>30.00a (0.00)	>30.00a (0.00)	13.83e (1.26)	16.83d (1.26)
L (-)	48.96a (0.35)	43.94b (1.19)	35.55g (0.92)	43.53b (0.19)	42.61bc (1.42)	39.20de (3.18)	36.53fg (0.37)	38.42ef (0.92)	42.44bc (0.54)	48.10a (0.55)	42.44bc (1.94)	48.64a (1.19)	49.40a (0.23)	40.66cd (1.04)	40.25de (0.10)	39.64de (1.56)	41.11cd (1.11)	48.18a (0.37)
a (-)	3.96e (0.16)	4.54cde (0.80)	3.87ef (0.19)	5.39b (0.07)	4.15e (0.21)	4.53cde (0.89)	4.04e (0.11)	5.05bcd (0.25)	5.61b (0.05)	4.40de (0.39)	5.15bc (0.39)	4.20e (0.16)	4.01e (0.48)	5.60b (0.20)	4.58cde (0.40)	3.21f (0.88)	6.92a (0.24)	4.06e (0.38)
b (-)	14.84bcd (0.47)	13.63de (1.85)	11.26fg (0.44)	16.47ab (0.11)	12.59ef (0.45)	12.46ef (1.72)	10.58gh (0.22)	12.98e (0.57)	16.21ab (0.06)	15.33abc (1.03)	14.85bcd (1.09)	15.15a-d (0.08)	14.99a-d (1.51)	15.60ab (0.64)	13.52de (0.75)	9.60h (1.88)	16.56a (0.61)	13.83cde (1.02)

* Means followed by similar letters for a given dependent variable are not significantly different at P<0.05, LSD. Values in parentheses are standard deviation. MC is moisture content, a_w is water activity, BD is bulk density, UD is unit density, ER is expansion ratio, PDI is pellet durability index, WAI is water absorption index, WSI is water solubility index, WS is water stability.

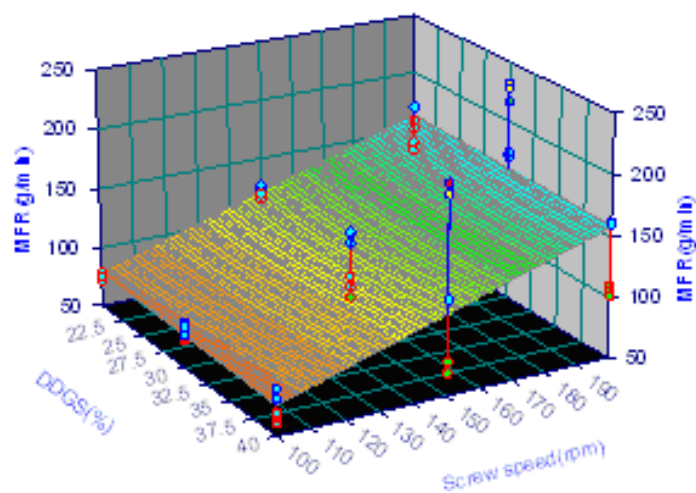


Figure 1 Treatment combination effects on mass flow rate.

$$\text{MFR (g/min)} = -1.19 - 0.19 \cdot \text{DDGS (\%)} + 0.84 \cdot \text{SS (rpm)}$$

$$(R^2 = 0.54, F = 29.58)$$

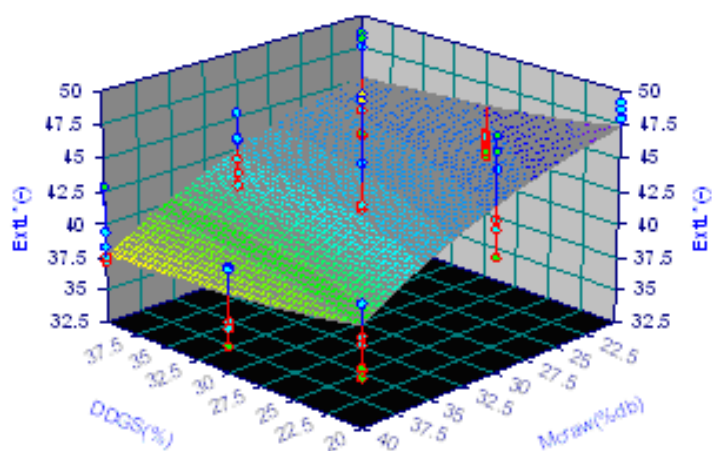


Figure 2 Treatment combination effects on extrudate brightness (Hunter L).

$$L_{\text{ext}} = 43.88 + 90.59 / \text{DDGS (\%)} - 1.33 \cdot 10^{-4} \cdot \text{MC}_{\text{raw}}^3 (\%)$$

$$(R^2 = 0.55, F = 31.76)$$